

M-SERIES

INSTRUCTIONS

THANK YOU AND CONGRATULATIONS ON PURCHASING AN M-SERIES LED LIGHT BAR! WITH RIGID'S PATENTED "HYBRID OPTICS", THE M-SERIES RISES ABOVE THE COMPETITION IN EFFICIENCY & PROJECTION. YOUR NEW LIGHT IS A TRUE EXAMPLE OF THE HIGHEST IN LED LIGHTING TECHNOLOGY. THANK YOU FOR SUPPORTING **RIGID INDUSTRIES** AND ENJOY YOUR NEW LED LIGHT BAR!


RIGIDINDUSTRIES.COM

FUSE CHART

LIGHT	4"	6"	10"	20"	30"	40"
AMPS	5	5	10	15	20	20

IN THE BOX:

- A = 1/4" NYLON LOCKNUTS (2)
 - B = MOUNTING BRACKET (2)
 - C = COMPRESSION SPACERS (2)
 - D = LIGHT BAR
- WARRANTY CARD

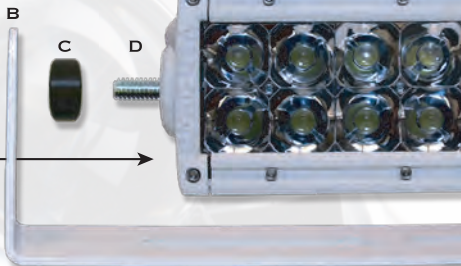

WHETHER MOUNTING THE LIGHT WITH PROVIDED BRACKETS OR BY OTHER MEANS, BE SURE TO USE THE COMPRESSION SPACER. FAILURE TO DO SO WILL CAUSE YOUR LIGHT TO ROTATE OR SPIN. TO INSTALL WITH PROVIDED BRACKETS, REMOVE NUT ON END BOLT AND SLIDE BRACKET ON COVERING COMPRESSION SPACER. REPLACE NUT ONTO END BOLT AND SNUG DOWN. WAIT TO SECURE BOTH NUTS UNTIL YOU HAVE YOUR LIGHT WORKING AND IN DESIRED POSITION.



WIRING THE LIGHT IS AS SIMPLE AS WIRING INTO ANY EXISTING 12-36VDC POWER SOURCE. IF INSTALLING NEW WIRING, BEWARE OF SHARP EDGES, ABRASIVE SURFACES AND HEAT SOURCES. IT IS RECOMMENDED THAT YOU USE A FUSE (SEE CHART ABOVE) TO PROTECT AGAINST THE POSSIBILITY OF A POWER SURGE. RED WIRE TO POSITIVE, BLACK TO CHASSIS GROUND OR BATTERY NEGATIVE.

FOR MORE INFORMATION, OR FOR QUESTIONS REGARDING INSTALLATION, VISIT OUR WEBSITE OR CALL US AT:

480-655-0100

